

APEXA® A-1500



Features

- Highly Cost-effective
- Power-efficient Cortex™-A17 Quad-Core Processor
- Android 6.0 with Developer-friendly SDK
- Sleek and Compact Body with Small Footprint
- 15" Bezel-Free True-Flat Display with PCAP Touch
- Optional 2nd Touch Displays
- Multiple I/O Interfaces for Peripherals
- Flexible Installation on a Counter or a Wall




Specifications

System	Processors	Cortex™- A17 Quad-Core (Up to 1.8GHz)
	Memory	1GB Standard, DDR3L 1600 MT/s, On-board (Max. 2GB Optional)
	Storage	eMMC 8GB, On-board (Max. 64GB Optional)
	Operating Systems	Android 6.0 (Marshmallow)
	Audio	Realtek ALC5640
Display	Type	15" TFT LCD, LED Backlight
	Resolution	1024 x 768
	Brightness	300 cd/m ² (typ.)
	Touchscreen	Projective Capacitive Touch
Interface	Display	1x VGA (With Power Output)
	USB	6 (Rear 2, Back 4, USB 2.0 x 6) 3 (Reserved for MSR, SCR, i-Button/Touch Controller), RJ-45
	Serial	6 (COM 1 with 5V/12V Power Output on 9 Pins, BIOS) (COM2-3 RJ-45 , Full Signal) (COM4 RJ-11, Only TX/RX, 12V Power Output, Reserved for CDP) (COM5 Reserved for Cash Drawer Port) (COM6 RJ-45, Only TX/RX, 5V Power Output, Reserved for MSR)
	LAN	1x Gigabit Ethernet, RJ-45
	Audio	1x Line-out
	Power DC-IN	1x (4 Pin Connector)
	Power Supply	Adaptor 12V, 5A
Physical & Environmental	Operating Temperature	0 °C ~ 60 °C at 10% to 90% Humidity
	Storage Temperature	-20 °C ~ 80 °C at 10% to 90% Humidity
	Dimensions (W x H x D)	364 x 333 x 210 (mm), 14.3 x 13.1 x 8.2 (in)
	Packing Dimensions (W x H x D)	500 x 470 x 300 (mm), 19.6 x 18.5 x 11.8 (in)
	Net Weight	5,300g, 11.6lbs
	Packing Weight	8,000g, 17.6lbs
	Certification	CE, FCC, KC
	Color	Matte Dark Grey, High Gloss White


Options & Peripherals	2nd Displays	9.7", 12.1", 15" LCD Display, 1024 x 768, Optional Touchscreen
	Customer Display	VFD, 20 Columns x 2 Lines
	I/O Expansion	1x COM5 (RJ-45 8 Pins) (Factory Option) 1x Cash Drawer Port (RJ-11 6 Pins) (Factory Option)
	Storage	Micro SD (Factory Option), Max 128GB
	Magnetic Stripe Reader	Comply with ISO 7811, Support 1 & 2 & 3 Track
	Smart Card Reader	EMV Level 1, 2
	Dallas	Dallas i-button Reader
	Fingerprint	Yes
	Wall Mount Kit	VESA-Compatible, 75 x 75 (mm), 100 x 100(mm)
	Serial Conversion Cable	RJ-45 to D-sub 9
	Speaker	2 x 0.8W (Stereo) (Factory Option)
	WiFi	Bluetooth (V4.0)+ WLAN (802.11 a/b/g/n, 2.4G) combo module, On-board (Factory Option)

Dimensions

Unit : mm

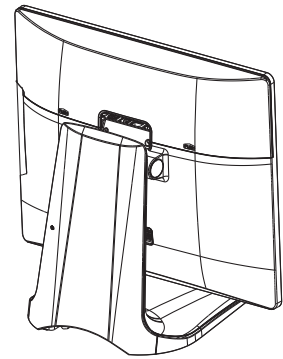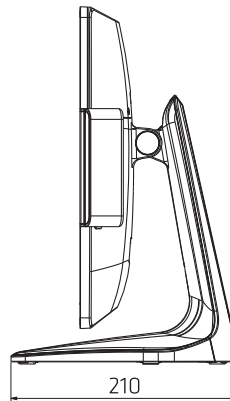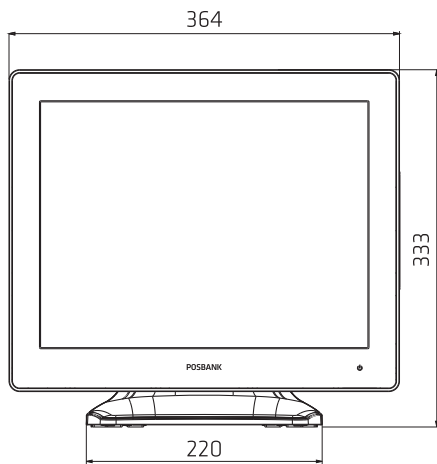

I/O Interfaces

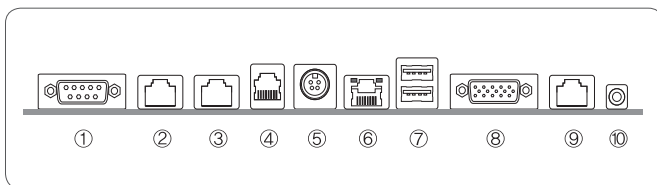

- | | |
|-------------------------|---------------|
| ① COM 1 | ⑥ LAN |
| ② COM 2 | ⑦ USB 2.0 x 2 |
| ③ COM 3 | ⑧ VGA |
| ④ COM 4 | ⑨ MSR |
| ⑤ Power Connector / 12V | ⑩ AUDIO OUT |

Ordering Information

Part No.	Description
APEXA A-1500 (G)	Cortex-A17 Quad-Core, DDR3 1GB, eMMC 8GB, 15" P-CAP Touch, Dark Grey, Android 6.0
IPO-MS 237 C AX_G	MSR, Dark Grey
IPO-MS 237E2_SCR_AX	MSR + SCR, Dark Grey
IPO-MS 237DIB_AX_G	MSR + i Button, Dark Grey
APEXA_9.7 (G)	9.7" 2nd Display, Dark Grey, No Touch
APEXA_12.1 (D/G)	12.1" 2nd Display, Dark Grey, No Touch
APEXA_15 (D/G)	15" 2nd Display, Dark Grey, No Touch
APEXA_CDP (G)	Customer Display(VFD), Dark Grey
AXP-06 BRACKET_WALL MOUNT	Wall Mount

Peripherals



2nd Display
• 9.7", 12.1", 15" LCD



Customer Display
• VFD (2 Line x 20 Characters)



Card Reader
• MSR, SCR

POSBANK® www.posbank.com sales@posbank.com

Copyright © 2018 POSBANK Co., Ltd.

POSBANK and the POSBANK logo are trademarks of POSBANK in the United States and other countries. All trademarks are the property of their respective owners. Intel, Celeron, Core are registered trademarks of Intel Corporation in the United States and other countries. Microsoft, Windows 7, Windows 8.1, Windows 10 IoT Enterprise and POS Ready 7 are registered trademarks of Microsoft Corporation in the United States and other countries. POSBANK shall not be liable for technical or editorial errors or omission contained herein. The information in this publication is informational purposes only and may be altered or amended by POSBANK. All statements regarding POSBANK's direction and intent are subject to change or withdraw without notice. Specifications may change without prior notice.